
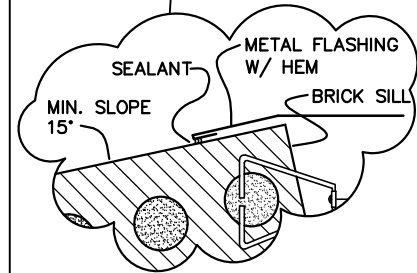


- (A) BRICK VENEER RETURN @ JAMB
- (B) CONCAVE MORTAR JOINT
- (C) PRE-FINISHED METAL FLASHING W/ SEALANT
- (D) SLOPE BRICK MIN. 15° W/ 1" OVERHANG
- (E) FILL COLLAR & CORES SOLID
- (F) WEEPS
- (G) ONE PIECE MEMBRANE FLASHING
- (H) 2" AIR SPACE
- (J) SIDE MOUNTED ADJUSTABLE TIES W/ INSULATION SUPPORTS
- (K) 2 1/8" (R=12) RIGID INSULATION
- (L) LIQUID OR MEMBRANE - (AIR/VAPOR/MOISTURE BARRIER)
- (M) 5/8" EXTERIOR SHEATHING (SEAL JOINTS)
- (N) 6"-16 GA. STEEL STUD @ 16" O.C.
- (P) 1/2" GYPSUM WALL BOARD

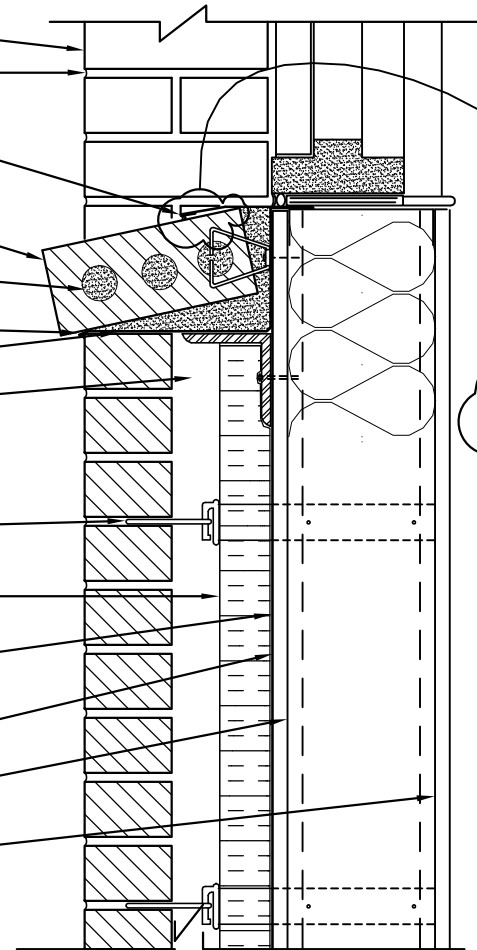

BRICK VENEER/METAL STUD (BRICK) SILL DETAIL

S4.1

W/ AVB

SCALE: N.T.S.