

BITUTHENE® PRIMER B2

Specially formulated primer for use with Bituthene membranes and Grace underlayments on green concrete or damp substrates

Description

Bituthene® Primer B2 is a rubber-based primer in solvent specially formulated to provide good initial adhesion of Bituthene waterproofing membranes and Grace underlayments.

In addition, its patented formulation promotes the adhesion of Bituthene membranes to green concrete and damp surfaces.


The VOC (Volatile Organic Compound) content is 440 g/L and it meets the U.S. E.P.A. Volatile Organic Compound Emissions Standards for Architectural Coatings.

Architectural and Industrial Maintenance Regulations limit the VOC content in products classified as Architectural Coatings. Refer to Technical Letters at www.graceconstruction.com for most current list of allowable limits.

Use

Bituthene Primer B2 is used to prime green concrete (less than seven day cure for normal structural concrete). It is also used to prime damp concrete, masonry or wood surfaces on which Bituthene waterproofing membranes or Grace underlayments will be applied.

Bituthene Primer B2 is used for vertical and horizontal applications at 25°F (-4°C) or above.

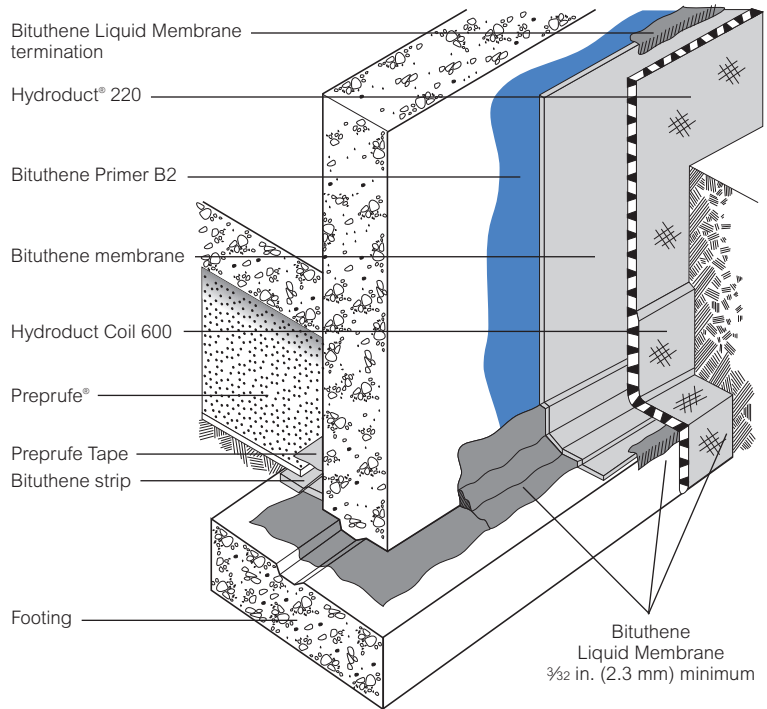

Drawings are for illustration purposes only. Please refer to www.graceconstruction.com for specific application details.

Supply

Bituthene Primer B2

Unit size	5 gal (18.9 L) pail
Weight	44 lbs (20 kg)/pail
Units per pallet	48 pails
Coverage	250–300 ft ² /gal (6–8 m ² /L)

Application Procedures

Safety, Storage and Handling Information

Bituthene products must be handled properly. Vapors from solvent-based primers and mastic are harmful and flammable. Grace Protection Board Adhesive is extremely flammable. For these products, the best available information on safe handling, storage, personal protection, health and environmental considerations has been gathered. Material Safety Data Sheets (MSDS) are available at www.graceconstruction.com and users should acquaint themselves with this information. Carefully read detailed precaution statements on product labels and the MSDS before use.

Application

Bituthene Primer B2 may be applied by roller or brush. Use a heavy nap roller made of natural material, such as lamb's wool.

Apply it to clean, dirt free, frost-free surfaces at a coverage rate of 250–350 ft²/gal (6–8 m²/L). Do not apply to frozen concrete or to areas with standing or visible water. Do not use during wet weather. Allow Bituthene Primer B2 to dry one hour or until tack-free. Dry time may be longer in cold temperatures.

Deep puddles of primer should be avoided as this will lengthen drying time. Rollers or brushes should be dipped into pans. Avoid pouring primer directly onto a horizontal substrate. Do not apply directly to Bituthene membrane.

In general, priming should be limited to an area that can be covered with membrane within 24 hours. Areas that accumulate significant amounts of dust or dirt must be reprimed before membrane is applied.

Although it may be used on green concrete and damp surfaces, moisture may become trapped under the membrane. This may result in blistering, particularly on warm, sunny days. Therefore, cover the membrane as soon as possible to minimize blistering. If blistering occurs, allow membrane to cool and re-roll with heavy roller. Blisters over 4 in. (100 mm) in diameter should be cut and patched.

Clean tools with mineral spirits at the end of each day. Mineral spirits is a combustible liquid and should be used only in accordance with the manufacturer's safety recommendations. **Do not use solvents to clean hands or skin.**

www.graceconstruction.com

For technical assistance call toll free at 866-333-3SBM (3726)

Bituthene, Hydroduct and Preprufe are registered trademarks of W. R. Grace & Co.–Conn.

We hope the information here will be helpful. It is based on data and knowledge considered to be true and accurate and is offered for the users' consideration, investigation and verification, but we do not warrant the results to be obtained. Please read all statements, recommendations or suggestions in conjunction with our conditions of sale, which apply to all goods supplied by us. No statement, recommendation or suggestion is intended for any use which would infringe any patent or copyright. W. R. Grace & Co.–Conn., 62 Whittemore Avenue, Cambridge, MA 02140. In Canada, Grace Canada, Inc., 294 Clements Road, West, Ajax, Ontario, Canada L1S 3C6.

This product may be covered by patents or patents pending.
BIT-137E Printed in U.S.A. 4/07

Copyright 2007. W. R. Grace & Co.–Conn.
FA/LI/1M

GRACE