
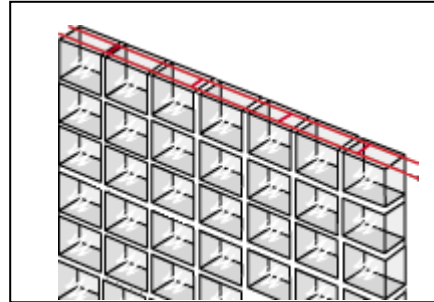


Glass Block Wire Reinforcement



Product Description

Dimension:

- Standard 9 gauge (.148 in) side rods and 9 gauge (.148 in) cross rods. Cross rods spaced 8" oc for optimum CMU core clearance.

Finish:

- *Exterior* (or *interior* walls with a mean relative humidity exceeding 75%) hot dip galvanized after fabrication zinc coated per ASTM A153/A153M-B2 (1.50 oz per square foot)

Uses:

- Glass block panels

Advantages:

- Stabilizes glass block panels

For technical assistance call us toll free at 1-800-659-4731.