
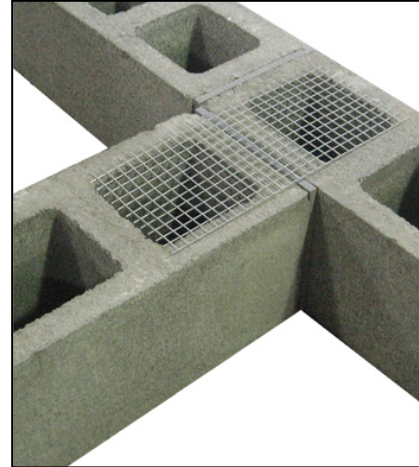


# Mesh Tie

Masonry to Masonry

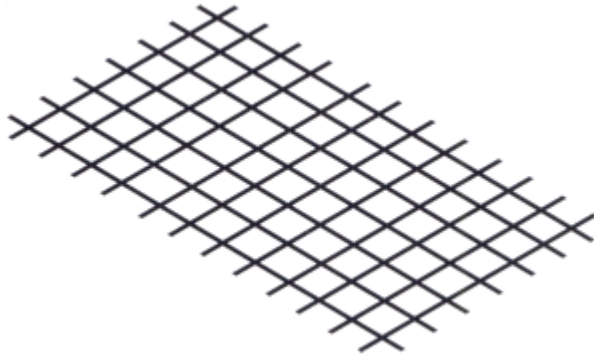

## Product Description

### Dimension:

- Stock: 16 gauge - ½" square mesh X 6" X 14"

(Custom sizes available)

### Finish:

- *Interior* and *Exterior*, only available in hot dip galvanized after fabrication zinc coating per ASTM A153/A153M Class B2 (1.50 oz. per sq ft)

### Uses:

- Tying masonry to masonry for non-bearing and non-shear intersecting perpendicular CMU walls.

### Advantages:

- Simple and economical to install.
- Performs well and can be bent flush out of the way against the CMU to reduce the safety hazard.
- Pliable enough to be bent back into the bed joint when the intersecting wall is constructed.
- Reduces safety concerns present with Z straps or protruding wire reinforcement.

**For technical assistance call us toll free at 1-800-659-4731.**