
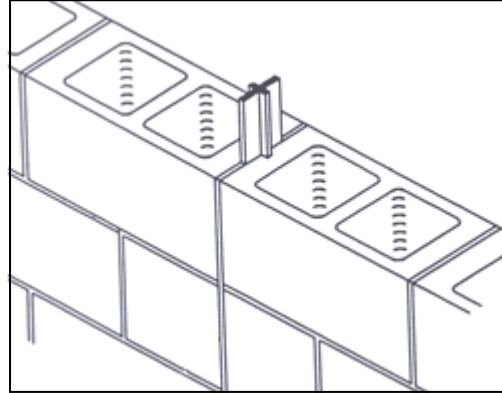


PVC Control Joint

CMU Control Joint



Product Description

Dimension:

- Standard 2-5/8" with 1/4" and 5/8" flanges x 48"

Finish:

- PVC compound with 85 durometer hardness
- Conforms to ASTM D2287 Type 654, ASTM D 2240
- Tensile-Strength 2000 psi
- Specific Gravity 1.29
- Ultimate Elongation-Sheet 420%
- Water Absorption +0.141%
- Brittle Point (calculated) -30° F
- Hardness-Shore A/10 85 +/-5 Shore A

Use:

- CMU Control Joints

Advantages:

- Simple and economical to install
- Fits most CMU sash ends

For technical assistance call us toll free at 1-800-659-4731.