




# PRODUCT SUBMITTAL




## # 2401 RJ-711 Adjustable Veneer Anchor

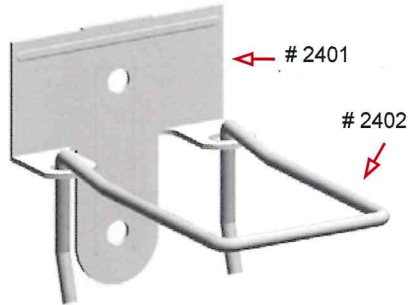

Tying Masonry To Steel Stud

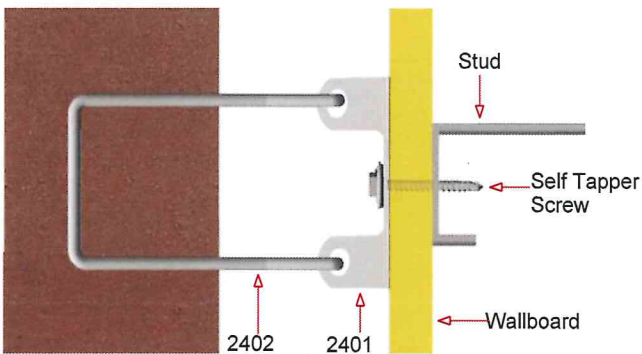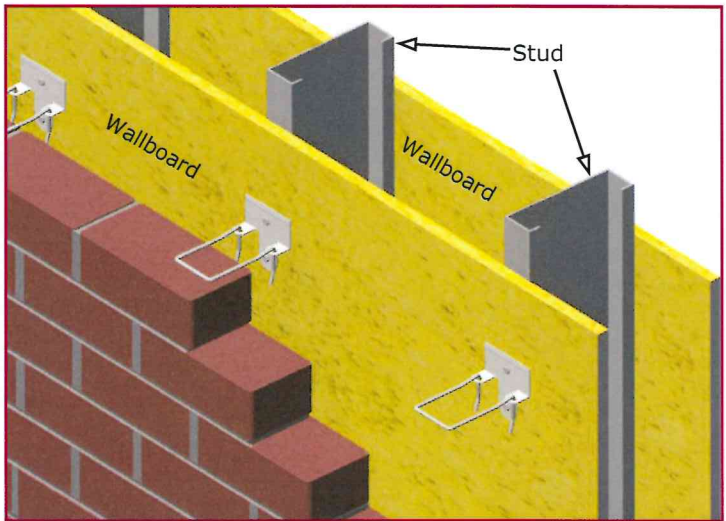

MATERIAL CONFORMANCE	SIZES / FINISHES
<p><b>ASTM A82 / A82M</b> - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi</p> <p><b>ACI / ASCE 530</b> - (Building code requirements for masonry structures)</p> <p><b>SHEET METAL</b> - (Carbon Steel) <b>ASTM A1008 / A1008M</b></p> <p>Mill Galvanized / Zinc Coating: <b>ASTM A641 / A641M (0.10 Oz per sq ft)</b></p> <p>Hot Dip Galvanized after fabrication / Zinc Coating <b>ASTM A153 / A153M-B2 (1.50 oz per sq ft)</b></p> <p>Stainless Steel <b>ASTM 580 / ASTM 580M Type 304</b> (Type 316 available on special order)</p>	<p><b># 2401 RJ711:</b></p> <p><input type="checkbox"/> 14 gauge    <input type="checkbox"/> 12 gauge</p> <p>Must be 3/4" more than insulation</p> <p><b>Insulation:</b></p> <p><input type="checkbox"/> 0"   <input type="checkbox"/> 1"   <input type="checkbox"/> 1-1/2"   <input type="checkbox"/> 2"   <input type="checkbox"/> 2-1/2"</p> <p><input type="checkbox"/> 3"   <input type="checkbox"/> 3-1/2"   <input type="checkbox"/> 4"</p> <p><b># 2402 Hook:</b> 3/16" diameter</p> <p><input type="checkbox"/> 3-1/4"   <input type="checkbox"/> 4-1/4"   <input type="checkbox"/> 5-1/4"   <input type="checkbox"/> Other _____</p>
<p><b>Steel Products (flats):</b> Mill Galvanized &amp; Hot Dip, 59.2% Post-Consumer 8.8% Post Industrial / Pre - Consumer</p> <p>Stainless Steel, 60% Post Consumer V O C Content - 0%</p> <p><b>WIRE Recycled Content:</b> Mill Galvanized &amp; Hot Dip, 87% Post-Consumer 13% Post Industrial / Pre - Consumer</p> <p>Stainless Steel, 60% Post Consumer V O C Content - 0%</p>	<p><b>FINISH:</b></p> <p><input type="checkbox"/> Mill Galvanized</p> <p><input type="checkbox"/> Hot Dip Galvanized</p> <p><input type="checkbox"/> Stainless Steel</p> 



**MASONPRO, Inc.**  
Northville, MI 48167  
1-800-659-4731  
www.masonpro.com