
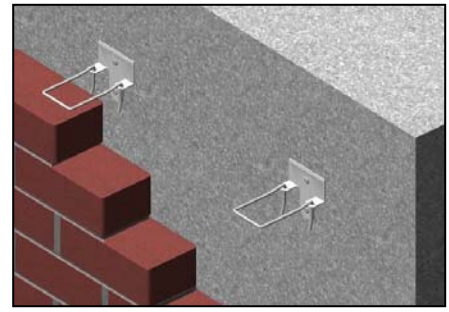


PRODUCT DATA SHEET

Brick Veneer on CMU or Concrete Substrate

Surface Mounted without insulation -
Anchor in Tension

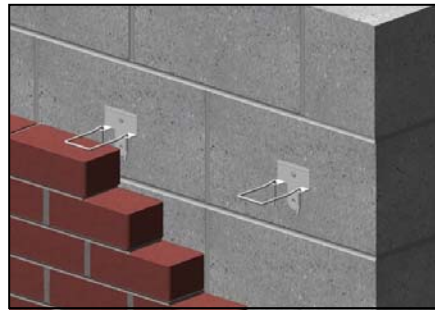

Product Description

Dimension:

- Standard 14 gauge X ABV2002 for standard veneer with narrow cavity w/ 3/16" X 3" pintle tie

Finish:

- *Exterior* Hot dip galvanized after fabrication zinc coated per ASTM A153/A153M-B2 (1.50 oz per square foot).

Uses:

- Tying brick veneer to existing CMU or Concrete Substrate without rigid insulation

Advantages:

- Simple and economical to install

Fastener:

Hit Pins – for CMU & Concrete
1/4" X 1-1/4"



For technical assistance call us toll free at 1-800-659-4731.