
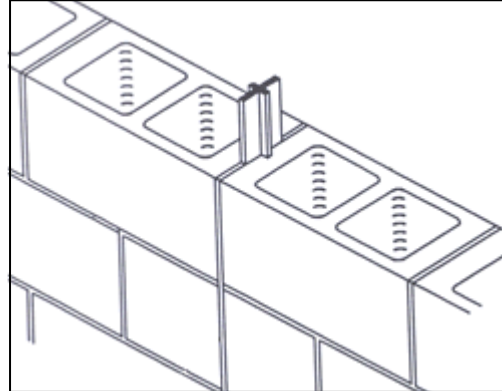


# Rubber Control Joint

CMU Control Joint



## Product Description

### Dimension:

- Standard 2-5/8" with 1/4" and 5/8" flanges x 48"

### Finish:

- Rubber compound with Durometer Hardness of 85 +/- 5 Shore A/10
- Conforms to ASTM D2000 2 AA 805, ASTM D2240
- Tensile-Strength 2425 psi
- Modulus @ 100 elongation, psi 1100
- Specific Gravity 1.32
- Ultimate Elongation-Sheet 375%
- Water Absorption per ASTM D570
- Brittle Point (calculated) -10° F

### Use:

- CMU Control Joints

### Advantages:

- Simple and economical to install
- Fits most CMU sash ends

**For technical assistance call us toll free at 1-800-659-4731.**