



PRODUCT SUBMITTAL



1100 Triangular Tie Seismic

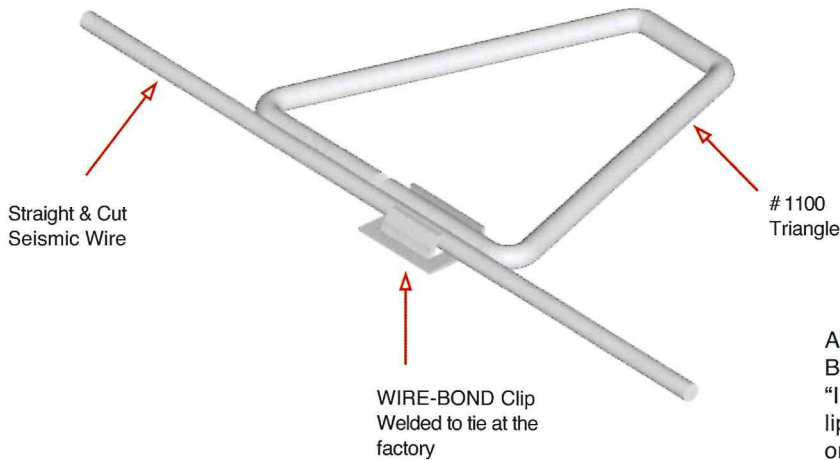

All WIRE-BOND® seismic products meet Uniform Building Code requirements listed in 1403.6.4.2. "In seismic zones A – F, wall ties shall have a lip or hook on the extended leg that will engage or enclose a horizontal joint reinforcement wire having a diameter of 0.148 inch (3.76mm) (No. 9 B.W. gauge) or equivalent. The joint reinforcement shall be continuous with butt splices between ties permitted."

MATERIAL CONFORMANCE		SIZES / FINISHES	
ASTM A82 / A82M - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi ACI / ASCE 530 - (Building code requirements for masonry structures) SHEET METAL - (Carbon Steel) ASTM A1008 / A1008M Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 Oz per sq ft) Hot Dip Galvanized after fabrication / Zinc Coating ASTM A153 / A153M-B2 (1.50 oz per sq ft) Stainless Steel ASTM 580 / ASTM 580M Type 304 (Type 316 available on special order)		# 1100 Triangle Diameter: <input type="checkbox"/> 3/16"Ø <input type="checkbox"/> 1/4"Ø # WIRE BOND Clip: 16 gauge Finishes: <input type="checkbox"/> Mill Galvanized <input type="checkbox"/> Hot Dip Galvanized <input type="checkbox"/> Stainless Steel	
Steel Products (flats): Mill Galvanized & Hot Dip, 59.2% Post-Consumer 8.8% Post Industrial / Pre-Consumer Stainless Steel, 60% Post Consumer V O C Content - 0%		# 1100 Triangle Size: <input type="checkbox"/> 3" x 3" <input type="checkbox"/> 6" x 6" <input type="checkbox"/> 4" x 4" <input type="checkbox"/> 7" x 7" <input type="checkbox"/> 5" x 5" <input type="checkbox"/> 7" x 9" <input type="checkbox"/> Other _____ Straight & Cut Seismic Wire: 10'-0" Lengths <input type="checkbox"/> 9 gauge <input type="checkbox"/> 3/16" diameter	
WIRE Recycled Content: Mill Galvanized & Hot Dip, 85% Post-Consumer 13% Post Industrial / Pre-Consumer Stainless Steel, 60% Post Consumer V O C Content - 0%			



MASONPRO, Inc.
 Northville, MI 48167
 1-800-659-4731
 www.masonpro.com