


# Thermalay

## ELECTRICALLY HEATED PADS

ESTABLISHED SINCE 1965

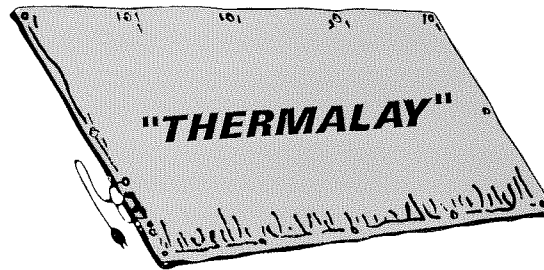

(15 Watts per Square Foot)

### Advantages:

- Easily Handled
- 28 Day Strength in 7 Days
- Eliminate Schedule Delays
- Economical
- Reliable
- No Open Flame

### Applications:

- Thaw Ground
- Heat Sand Piles
- Flat Work
- Walls
- Bridge Decks
- Cure and Protect Concrete
- Storage Tanks

### Standard Size

9' x 15'  
 4 1/2' x 30'  
 9' x 9'  
 4 1/2' x 15'  
 9' x 27'  
 55 gal. drum

### Voltage

110 or 220  
 110 or 220  
 110 only  
 110 only  
 220 only  
 110 only

### Amperage

19 or 12  
 19 or 12  
 10  
 8  
 20  
 3

### Approx. Weight

39#  
 39#  
 24#  
 20#  
 85#  
 12#

**Temperature Under Pad: 50° to 60° Above Ambient Air Temperature.**

### Specifications:

Sealed on all four edges.  
 Constructed of reinforced PVC, top & bottom  
 A 6' cord, no plug.  
 Insulated with 1/4" closed cell insulation.  
 Grommets 5' on center.

Cost per Hour to operate pads equals:  

$$\frac{\text{Cost per K.W. hour} \times \text{Sq. Ft. of Pad} \times \text{Watts per Sq. Ft.}}{1000}$$