
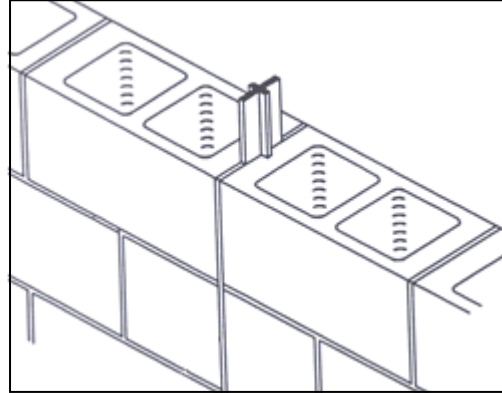


PVC Control Joint

CMU Control Joint



Product Description

Dimension:

- Standard 2-5/8" with 1/4" and 5/8" flanges x 48"

Finish:

- PVC compound with Durometer Hardness of 85 +/- 5
- Hardness configures to ASTM D2287, ASTM D2240
- Tensile-Strength 2000 psi
- Specific Gravity 1.29
- Ultimate Elongation-Sheet 420%
- Water Absorption +0.141%
- Brittle Point (calculated) -300 F
- Hardness-Shore A, Type 654-4, Type 654-06

Use:

- CMU Control Joints

Advantages:

- Simple and economical to install
- Fits most CMU sash ends

For technical assistance call us toll free at 1-800-659-4731.