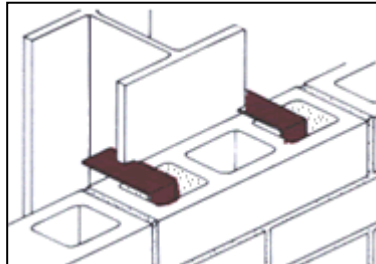
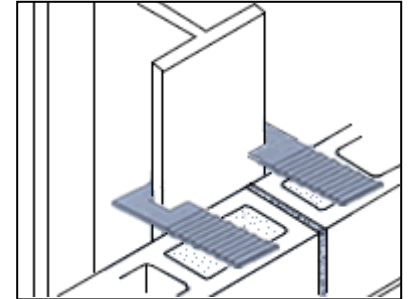


Notched Column Anchors

Masonry to Steel

**AC4010****AC4020****AC1600**

Product Description

Dimension:

- ❑ **AC4010** Standard 2" x 1/8" x 7" long with 2" bend – Right
- ❑ **AC4020** Standard 2" x 1/8" x 7" long with 2" bend – Left

- ❑ **AC1600** Standard 2" x 1/8" x 7" long corrugated – Right or Left

Finish:

- *Interior* (not in contact with moisture) mill galvanized per ASTM A641 / A641M (0.10 oz. per square foot)

- *Exterior* (or interior walls with a mean relative humidity exceeding 75%) hot dip galvanized after fabrication/ zinc coating per ASTM A153 / A153M-B2 (1.50 oz per square foot).

Uses:

- Tying CMU to vertical steel columns

Advantages:

- Simple and economical to install
- Allows for vibration and movement of the steel

For technical assistance call us toll free at 1-800-659-4731.