

TECH DATA

Everlastic® Expand-O-Foam 1380 series

Description


- When used as a joint filler and backer material you can caulk directly to **Expand-O-Foam** as it is an inherent bond breaker - - no three sided adhesion.
- As a plank product **Expand-O-Foam** has excellent strength, resistance to creep under load, vibration and shock absorbency, and water resistance characteristics.

revised: 3-10-03
revised: 12-15-05
revised: 12-27-06

Installation

- Adhere **Expand-O-Foam** to slab using Scotch Grip #4693. Pour new slab.

Cold applied sealant.

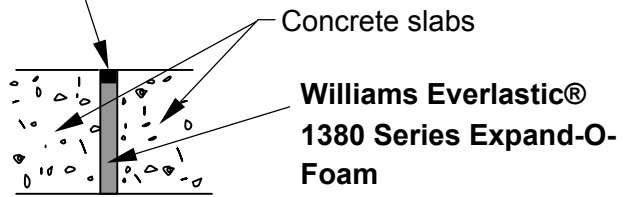

Material Specifications

- ASTM D - 3575/ASTM D-1056

Applications

- Concrete expansion joint filler for use with cold applied sealants. Place **Expand-O-Foam 1380** against formed concrete, subsequent concrete placement directly to it.
- Pipe isolation, thermal wrap.
- Masonry expansion joints.

Available Sizes and Packaging

- Standard thickness 5/8" to 4", 48" wide and 108" long.
- Available with self-stick, pressure sensitive adhesive (PSA) on one or two sides.
- Will cut to custom thickness, width and length.

Typical Physical Properties

Typical Physical Properties	Unit	Test Method	Typical Results
Density:	lb/ft ³	ASTM D-3575	2 to 2.4
Tear Strength	lb/in	ASTM D-3575	13
Compression Creep	psi	ASTM D-3575	<5%@3.0
Compression Strength	25% deflection psi	ASTM D-3575	10.5
	50% deflection psi	ASTM D-3575	19
Compression Set (loaded @ 1.5 psi 1000 hrs @ 50%)	%	ASTM D-3575	18
Tensile Strength (@1/2" thickness)	psi	ASTM D-3575	42
Water Absorption (lbs sf of cut surface)		ASTM D-1056	<0.2
Thermal Conductivity (BTU-in/hr/sf°F) at 75°F		ASTM C518	0.4 - 0.18
Thermal stability (change after 24 hrs at 165°F)	%	ASTM D-3575	<5



To the best of our knowledge this published information is accurate, however, to determine suitability of material/product for a specific application is the user's responsibility. Williams Products, Inc. shall not be liable for any loss or damage resulting from inappropriate usage.

WILLIAMS PRODUCTS, INC.

MASONPRO, Inc.
43300 Seven Mile Road
Northville, MI 48167
1-800-659-4731
www.masonpro.com