
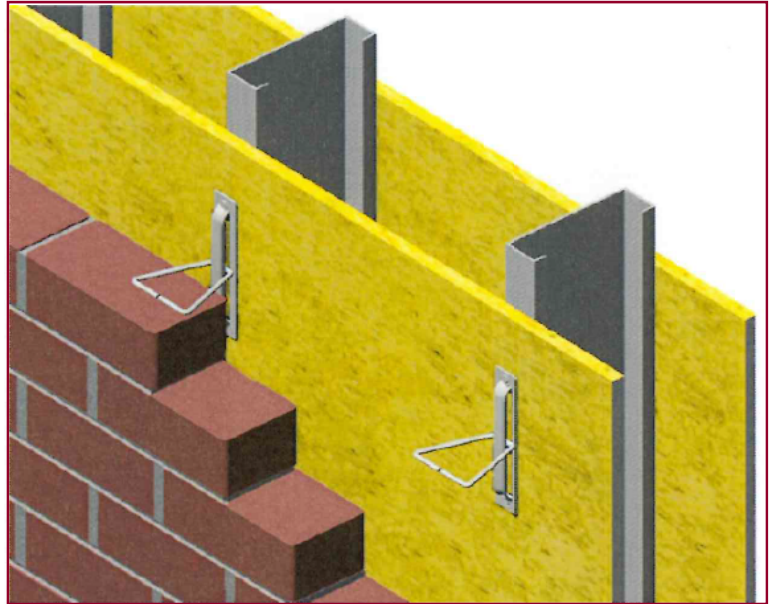


PRODUCT SUBMITTAL

WIRE-BOND

1004 Type III Screw On Veneer Anchor

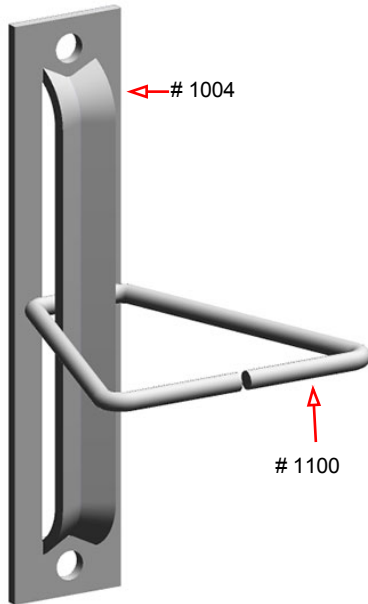

MATERIAL CONFORMANCE

SHEET METAL - (Carbon Steel) ASTM A1008 / A1008M

Mill Galvanized / Zinc Coating: **ASTM A641 / A641M (0.10 Oz per sq ft)**

Hot Dip Galvanized after fabrication / Zinc Coating
ASTM A153 / A153M-B2 (1.50 oz per sq ft)

Stainless Steel (WIRE) **ASTM A580 / ASTM A580M**
Stainless Steel (SHEET METAL) **ASTM A167 Type 304**
(Type 316 available on special order)

ASTM A82 / A82M - (Cold drawn steel wire)
Tensile Strength - 80,000 psi
Yield Point - 70,000 psi

ACI / ASCE 530 - (Building code requirements for masonry structures)

Steel Products (flats):
Mill Galvanized & Hot Dip,
58.4% Post-Consumer
12% Post Industrial / Pre -
Consumer

Stainless Steel,
60% Post Consumer
V O C Content - 0%

WIRE Recycled Content:
Mill Galvanized & Hot Dip,
83% Post-Consumer
17% Post Industrial / Pre -
Consumer

Stainless Steel,
60% Post Consumer
V O C Content - 0%

SIZES / FINISHES

1004 Type III: 1-1/4" wide x 6" long

☐ 14 gauge

1100 Triangle:

☐ 3/16" diameter

☐ 3"x3" ☐ 4"x4" ☐ 5"x5" ☐ 6"x6" ☐ 7"x9" ☐ 9" x 9"

FINISH:

☐ Mill Galvanized

☐ Hot Dip Galvanized

☐ Stainless Steel



www.wirebond.com

MASONPRO, Inc.
43300 Seven Mile Road
Northville, MI 48167
1-800-659-4731
www.masonpro.com