

## Mortar Deflection System - 2 inch masonry cavity wall

### DESCRIPTION



The Mortar Break® II mortar deflection mat works in conjunction with our masonry flashing and weep vents as a complete and effective moisture management system. Mortar Break® II is designed to prevent mortar droppings from blocking and clogging base wall and head joint drainage channels for 2" (50mm) masonry cavity wall applications. Mortar Break® II suspends excess mortar droppings above the weep holes and allows any water trapped within the cavity to seep down the flashing and out of the wall. The system also helps to maintain an airspace for ventilation and drying of the wall cavity.

### APPLICATIONS

- » For all cavity wall flashing locations including the base of the wall, above windows and doors, steel lintels, spandrels and shelf angles, or at any other penetrations or obstructions.
- » Mortar Break® II should be used with masonry through-wall flashing and weep vents from Advanced Building Products to provide a complete masonry moisture management system.

### BENEFITS

- » Polypropylene matrix deflects and suspends mortar droppings allowing moisture to drain from the wall assembly
- » Dimple design helps break up mortar droppings
- » Greater airflow compared to most plastic mesh based products
- » Anti-wicking material promotes enhanced drainage performance
- » Lightweight & easy to install. No mechanical fastening required
- » Made from 40% recycled content, contributes to LEED points
- » Able to withstand extreme temperatures
- » Available in 10 inch width / 35 ft. roll

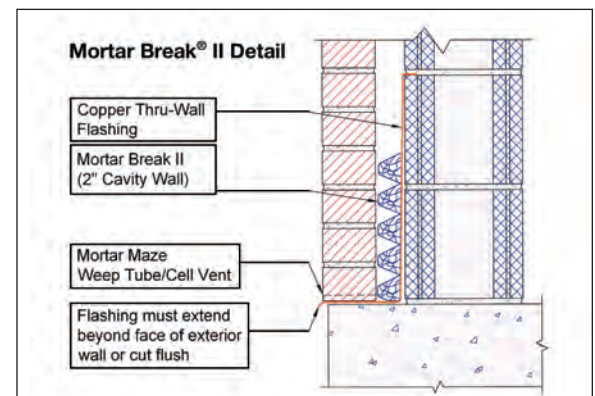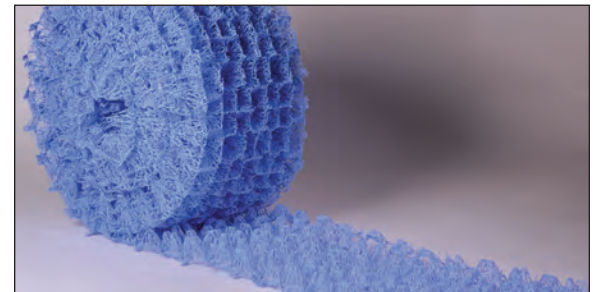

PHYSICAL DATA	Mortar Break® II
Core Material	Polypropylene
Thickness	1.60 in. (40.64 mm)
Roll Weight	4.0 lbs. (1.81 kg)
Length	35 ft. (10.67 m)
Width	10 in. (25.40 cm)