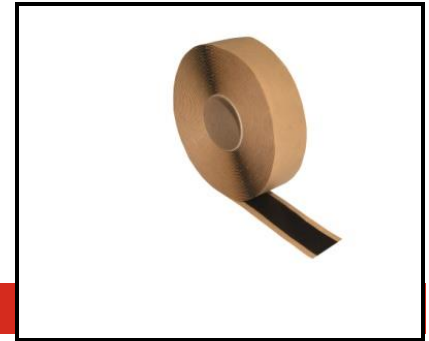


TECHNICAL INFORMATION SHEET

Enverge™ FlashGard™ Adhesive Tape

**Item Description**

15.2 m (50' rolls)

Item Number

W56RAC1699

Product Information

Description:

Firestone Enverge FlashGard Adhesive Tape is designed for splicing of Enverge FlashGard membrane panels and for attaching Enverge FlashGard membrane to substrates.

Method of Application:

1. Ensure Enverge FlashGard membrane surface is clean prior to application.
2. If necessary, wipe membrane with a clean cotton rag, using unleaded gas or denatured alcohol.
3. Apply Firestone 7877 Spray Adhesive Primer to membrane and substrate surfaces.
4. After application, allow solvents to flash off before mating. Use touch-push test to verify if solvents have flashed off; adhesive is ready to be bonded if pushing on adhesive with a clean dry finger reveals no stringing or movement of the adhesive layer. Open time usually ranges from 5 to 30 minutes.
5. These instructions are general in nature; refer to Firestone Building Products' Enverge FlashGard Thru-Wall Flashing specifications and details for specifics.

Storage:

- Store in original unopened containers at temperatures between 15.6 - 26.7 °C (60 – 80 °F) until ready for use.
- Do not store on job site in direct sunlight or at temperatures above 26.7 °C (80 °F).

Shelf Life:

- Shelf life of two (2) years can be expected if stored in original sealed containers at temperatures between 15.6 - 26.7 °C (60 – 80 °F). If exposed to lower temperatures, restore to room temperature prior to use.
- Shelf life will be shortened if exposed to elevated temperatures.
- Rotate stock to ensure stored material will not go beyond the shelf life of two (2) years.

Precautions:

Review Safety Data Sheet (SDS) prior to use.

LEED® Information:

Post-Consumer Recycled Content: 0%

Post Industrial Recycled Content: 0%

Manufacturing Location: Michigan Center, MI

*NOTE: LEED® is a registered trademark of the U.S. Green Building Council.

MASONPRO, Inc.
43300 Seven Mile Road
Northville, MI 48167
1-800-659-4731
www.masonpro.com

TECHNICAL INFORMATION SHEET

Enverge™ FlashGard™ Adhesive Tape

Typical Properties

Property	Typical Performance
Base	Butyl Polymer
Color	Black
Solvents	None
Solids	100%
Specific Gravity	1.15 - 1.25 (H ₂ O = 1)
Cure State	Cured
Thickness	1.588 mm (0.0625")
Width	38.1 mm (1.5")
Length	5.2 m (50.0')

Typical Characteristics

- Excellent moisture resistance.
- Excellent resistance to heat and cold.
- Excellent green tack.
- Tape is wound on release paper to facilitate handling.

PACKAGING:

5.2 m (50') rolls, 4 rolls per carton, 88 cartons per pallet.

Please contact Firestone Technical Services at 1-800-428-4511 for further information.

This sheet is meant to highlight Firestone products and specifications and is subject to change without notice. Firestone takes responsibility for furnishing quality materials which meet published Firestone product specifications. Neither Firestone nor its representatives practice architecture. Firestone offers no opinion on and expressly disclaims any responsibility for the soundness of any structure. Firestone accepts no liability for structural failure or resultant damages. Consult a competent structural engineer prior to installation if the structural soundness or structural ability to properly support a planned installation is in question. No Firestone representative is authorized to vary this disclaimer.