

MASONPRO, Inc.
 43300 Seven Mile Road
 Northville, MI 48167
 1-800-659-4731
 www.masonpro.com

PERM-A-BARRIER® VPL

Fluid applied vapor permeable air barrier membrane

Description

Perm-A-Barrier® VPL is a fluid applied, one component, acrylic membrane that cures to form a resilient, monolithic, fully bonded elastomeric sheet when applied to construction surfaces.


Perm-A-Barrier VPL membrane provides superior protection against the damaging effects of air and liquid water ingress on building structures. The product creates a solid barrier against air infiltration and exfiltration, which minimizes associated energy loss and condensation problems.

Perm-A-Barrier VPL membrane is vapor permeable for wall assemblies requiring this “breathable” characteristic. As a vapor permeable membrane, it permits the transfusion of water vapor that may otherwise condense in the wall structure; but is impermeable to liquid water, which allows the material to act as a water drainage plain.

The Volatile Organic Compound (VOC) content of Perm-A-Barrier VPL membrane is less than 30 g/L.

Advantages

- **Fire resistant** - meets **NFPA 285** as part of various wall assemblies with foam plastic insulation
- **Plasticizer, Phthalate and Halogen-free** - safe and environmentally-friendly
- **Air tight** - protects against air passage and associated energy losses. Meets new ASTM E2357 standard as required by IECC 2012.
- **Vapor permeable** - prevents moisture from being trapped in the wall cavity by allowing walls the ability to dry
- **Single component** - fast and easy application with simple spray equipment
- **Fully bonded** - transmits wind loads directly to the substrate
- **Seamless** - continuous membrane integrity with no laps
- **Damp surface tolerant** - can be applied to damp-to-touch surfaces
- **Strong adhesion** to common construction substrates such as wood, block, concrete, OSB, gypsum sheathing and metal
- **Compatible** with Perm-A-Barrier Flashing Systems

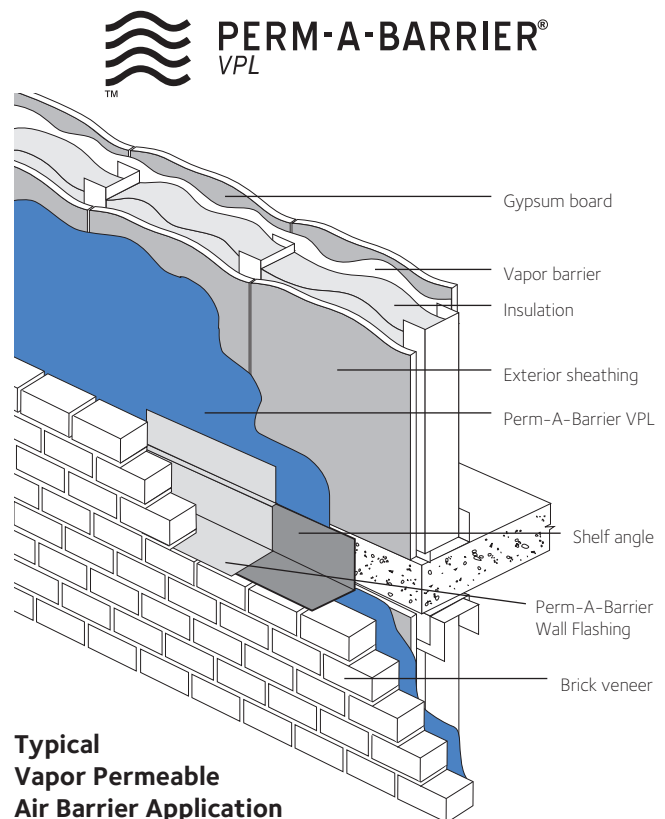

Typical Vapor Permeable Air Barrier Application

*Consult GCP for climate specific details

Drawings are for illustration purposes only. Please refer to gcpat.com for specific application details.

Principal Applications

Vapor permeable air barrier for new and remedial commercial and residential applications:

- Concrete block walls with brick veneer or pre-formed cladding panels
- Steel or wood stud walls with exterior gypsum sheathing, brick veneer or pre-formed panels, plywood and OSB

System Components

- **Perm-A-Barrier VPL membrane** – for vertical applications
- **S100 Sealant** – one part neutral curing, ultra low modulus silicone sealant for detailing and joint treatments
- **Bituthene® Liquid Membrane** – for details and terminations
- **Perm-A-Barrier Wall Flashing** – heavy duty fully-adhered membrane for through-wall flashing detailing
- **Perm-A-Barrier Detail Membrane** – flexible, fully-adhered membrane for detail flashing areas
- **Perm-A-Barrier Aluminum Flashing** – flexible, aluminum faced, fully-adhered membrane for detail flashing areas

Installation

Safety

Refer to product label and SDS (Safety Data Sheet) before use. All users should acquaint themselves with this information prior to working with the material. Carefully read detailed precaution statements on the product labels and SDS before use.

SDSs can be obtained from our web site at gcpat.com or by contacting us toll free at 866-333-3SBM (3726).

Surface Preparation

All surfaces must be sound and free from spalled areas, loose aggregate, loose nails or screws, sharp protrusions or other matter that will hinder the adhesion or regularity of the membrane installation. The surface must also be free from frost, dirt, grease, oil or other contaminants. Clean loose dust and dirt from the surface by brushing or wiping with a clean, dry cloth.

Concrete and Other Monolithic Cementitious Surfaces

Surface irregularities greater than ¼ in. (6 mm) across and/or ⅜ in. (3 mm) in depth should be pre-treated with Bituthene Liquid Membrane or repaired with a lean mortar mix or nonshrinking grout. Remove concrete form lines and any high spots greater than ⅜ in. (3 mm) in height to ensure uniform surface. On highly dusty or porous substrates it may be necessary to apply a scratch coat of Perm-A-Barrier VPL membrane prior to spraying to full thickness.

Perm-A-Barrier VPL membrane may be applied to green (minimum 3 day cure time) concrete or over damp to-touch surfaces. Remove any visible water prior to application.

Concrete Masonry Units (CMU)

The CMU surface should be smooth and free from projections. Strike all mortar joints full and flush to the face of the concrete block. Fill all voids and holes, particularly at the mortar joints, with a lean mortar mix or nonshrinking grout. Alternatively, a parge coat (typically one part cement to three parts sand) may be used over the entire surface.

Exterior Sheathing Panels

Perm-A-Barrier VPL membrane may be applied directly to exterior sheathing panels such as exterior drywall, plywood and oriented strand board (OSB) and glass faced wall boards. To avoid deflection at the panel joints, fasten corners and edges with appropriate screws. Fasteners should be driven flush with the panel surface (not counter sunk) and into the framing system in accordance with the manufacturers recommendations. Completely fill the sheathing joint with S100 Sealant and then install a scratch coat (approx. 15-30 mils) of S100 Sealant with a margin trowel or similar onto the face of the sheathing approximately 1 in. (25 mm) on each side of the sheathing joint, ensuring the edges are tapered to prevent shadowing of the spray application. Once the sealant is tack free, the Perm-A-Barrier VPL membrane may be applied.

Detailing

Detailing should be completed prior to applying the full coverage of Perm-A-Barrier VPL membrane. The field application should completely cover the detail areas to provide a continuous membrane.

For a complete description and instructions on individual details, consult the separate detail sheets found on our web site at gcpat.com.

Transitions to beams, columns, window and doorframes, etc. should be made with a strip of Perm-A-Barrier Detail Membrane, Perm-A-Barrier Aluminum Flashing or Perm-A-Barrier Wall Flashing product. Only Perm-A-Barrier Wall Flashing membrane can be used for through wall flashing applications or under masonry units. Optimum adhesion will be achieved when the membrane or flashing is lapped onto the cured Perm-A-Barrier VPL membrane. As soon as it is cured (approximately 24 hrs after application at 50% R.H, 68°F), the product is ready to accept self-adhered membranes or flashings.

A minimum 6 in. (150 mm) wide strip of Perm-A-Barrier Detail Membrane, Perm-A-Barrier Aluminum Flashing or Perm-A-Barrier Wall Flashing product should be installed and centered over all outside corners ensuring that all horizontal laps shed water. Installation of the self-adhered flashing at corners may be installed prior to the Perm-A-Barrier VPL LT application in accordance with the applicable data sheet and installation instructions or after the Perm-A-Barrier VPL LT product has cured. Avoid installing S100 Sealant under self-adhered flashing. Best practice would be to install corner flashing prior to detailing exterior sheathing joints with S100 Sealant. Any gaps around penetrations should be grouted solid or caulked with Bituthene Liquid Membrane or a polyurethane sealant prior to the Perm-A-Barrier VPL membrane application. Refer to GCP standard penetration details.

Membrane Application

Perm-A-Barrier VPL product can be installed through a spray application. It may be applied by roller or brush, however spray application is the preferred method. If applying Perm-A-Barrier VPL product by roller or brush, multiple material passes may be necessary to ensure that the required wet thickness is achieved.

Contact GCP for further details of local applicators, application techniques and spray equipment.

Application Temperature – In spray applications, Perm-A-Barrier VPL membrane may be applied at temperatures as low as 40°F (4°C). It is not recommended for use when cold and/or damp conditions exist for prolonged periods. The product is a water-based material. As with all water-based materials, it is subject to freezing at temperatures below 32°F (0°C).

Thickness Control

Application thickness is controlled in vertical applications by marking the area and spot-checking the thickness with a wet film thickness gauge. Swipe marks on the surface of the Perm-A-Barrier VPL product are acceptable as long as the minimum thickness is maintained.

Coverage Rates

Perm-A-Barrier VPL membrane is typically applied at a minimum thickness of 68 mils wet. The theoretical coverage rate (not including waste) at a thickness of 68 mils is approximately 23.6 ft²/gal to reach a 40 mil dry thickness.

Coverage may vary depending on application technique and may be reduced over rough and uneven substrates. The applicator goal should be a continuous membrane at a thickness of 68 mils wet, adjust coverage rate accordingly.

Drying

Perm-A-Barrier VPL membrane is dry to touch and can be overcoated within 4 hours under normal conditions (50% R.H, 68°F). The product dries through in 24 hours at normal conditions (50% R.H, 68°F). Drying and skinning times may vary depending on temperature, humidity and surface conditions.

Application of Insulation and Finishes

Perm-A-Barrier VPL membrane is not suitable for permanent exposure. Insulation boards may be installed after the product has fully cured. If the insulation or exterior finish cannot be applied within 6 months of the product application, some form of temporary protection (such as tarpaulins) should be used to protect the product from the effects of sunlight. Installation of insulation boards can be accomplished by using compatible mechanical fasteners or, solvent free insulation adhesive.

Cleaning

Tools and equipment are most effectively cleaned with using a dish soap mix of 1 oz/per gallon water.(i.e. Dawn® Ultra-2x Active Suds). This method works before material is cured. Mineral Spirits can be used on cured material on tools to remove. Flush system before its used to remove the light oil which was left from factory testing. NPL is a water base product, so soapy water mix to prime pump is best (1-2 gallons). For short shutdown periods, material can remain in equipment and delivery lines. Material should not be left in system for any period of time if temperatures are expected to drop below 40 °F (4 °C). Normal flushing of system use soapy mix until clear/clean mix is observed (stored at 40 °F or above).

** Long-term storage, after system has been cleaned with soapy water mix several options can be used. Flushing oil, Graco®- Pump Armor™, Titan™-LS-10 Liquid Shield™ Plus or Mineral Spirits can be pumped through system. Be sure to always pump soapy water mix prior to priming system with VPL

Storage and Handling

Perm-A-Barrier VPL membrane should be stored under cover in original sealed containers above 40°F (4°C) and below 90°F (35°C). The shelf life is 9 months in unopened containers.

Store opened containers with plastic protective liner covering the material.

Limitations

Perm-A-Barrier VPL should not be used in areas where it will be permanently exposed to sunlight, weather or traffic. Maximum UV exposure period is 6 months. For indirect or intermittent UV exposure applications, refer to Perm-A-Barrier VPO.

Do not apply the product in wet weather. It should not be applied if rain or temperatures below 40°F (4°C) are expected within 24 hrs. For applications below 40°F (4°C), refer to Perm-A-Barrier VPL LT.

Perm-A-Barrier VPL membrane should be kept from freezing as it is subject to freezing at temperatures below 32°F (0°C).

Perm-A-Barrier VPL has a maximum in-service temperature of 160°F (71.1°C).

Physical Properties

| Property | Typical Value | Test Method |
|--|--|------------------------|
| Color | Green | |
| Solids content by volume | 59% (approx.) | |
| Drying time @ 50% R.H., 68°F1 | 4 hours - tack free 24 hours - fully dry | |
| Water resistance of in-place membrane | Pass | ASTM E331 |
| Air permeance | <0.0003 L/s·m ² @ 75 Pa (<0.00006 cfm/ft ² @ 1.57 psf) | ASTM E2178 |
| Assembly air permeance | <0.2 L/s·m ² @ 75 Pa (<0.04 cfm/ft ² @ 1.57 psf) | ASTM E2357 |
| Water vapor transmission | 15 perms | ASTM E96 - Method B |
| Pull adhesion to glass-mat faced gypsum sheathing ² | 30 psi | ASTM D4541 |
| Pull adhesion to concrete | 100 psi | ASTM D4541 |
| Elongation | 250% | ASTM D412 - Die C |
| Tensile Strength | 110 psi | ASTM D412 - Die C |
| Nail sealability | Pass | ASTM D1970 |
| Low temperature flexibility | Pass at -20°F (-29°C) | ASTM D1970 |
| Wall assembly fire test | Pass as part of various wall assemblies with foam plastic insulation | NFPA 285 |
| ICC-ES AC 212 Acceptance Criteria For Water-Resistive Coatings used as Water-Resistive Barriers over Exterior Sheathing³ | | |
| Structural | Pass - No cracking within the field of the panel or at the substrate joints | ASTM E1233 Procedure A |
| Racking | Pass - No cracking within the field of the panel or at the substrate joints | ASTM E72 |
| Restrained environmental cycling test | Pass - No cracking within the field of the panel or at the substrate joints | ICC-ES AC 212 |
| Water penetration testing | Pass - No water penetration at the sheathing joints at the backside of the panel | ASTM E331 |
| Freeze-thaw | Pass - No sign of deleterious effects after 10 cycles | ASTM E2485 - Method B |

Footnotes:

1. Drying and skinning times may vary depending on temperature, humidity and surface conditions.
2. Failure occurs when glass facing pulls away from gypsum core Lab value, field results may vary.
3. Specific wall assemblies are available at gcpat.com.

Finished and exposed surfaces should be protected from overspray. Perm-A-Barrier VPL membrane should not be used in waterproofing applications in hydrostatic condition.

Perm-A-Barrier VPL membrane is not compatible with petroleum solvents, fuels and oils, materials containing creosote, pentachlorophenol or linseed oil.

gcpat.com | Customer Service: 1-866-333-3726

We hope the information here will be helpful. It is based on data and knowledge considered to be true and accurate, and is offered for consideration, investigation and verification by the user, but we do not warrant the results to be obtained. Please read all statements, recommendations, and suggestions in conjunction with our conditions of sale, which apply to all goods supplied by us. No statement, recommendation, or suggestion is intended for any use that would infringe any patent, copyright, or other third party right.

Perm-A-Barrier and Bituthene are trademarks, which may be registered in the United States and/or other countries, of GCP Applied Technologies Inc. This trademark list has been compiled using available published information as of the publication date and may not accurately reflect current trademark ownership or status. DensGlass Gold is a registered trademark of Georgia-Pacific Corporation.

© Copyright 2016 GCP Applied Technologies Inc. All rights reserved.

GCP Applied Technologies Inc., 62 Whittemore Avenue, Cambridge, MA 02140 USA.

In Canada, 294 Clements Road, West, Ajax, Ontario, Canada L1S 3C6.

GCP0083

PAB-121-0117