

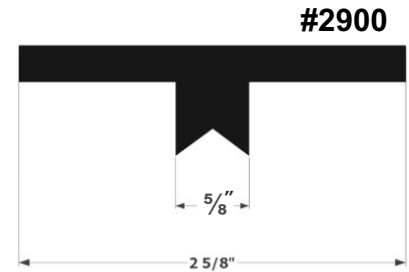


# PRODUCT SUBMITTAL

## Rubber Control Joint

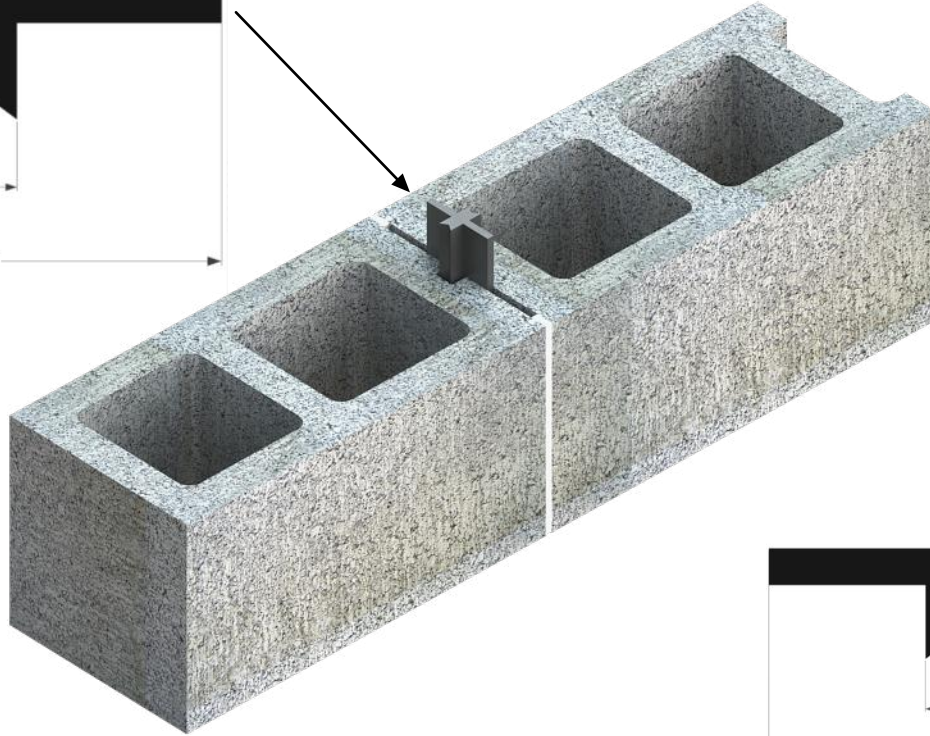

MATERIAL CONFORMANCE / PROPERTY VALUES		SIZES						
Rubber Control Joints allow for expansion and contraction of masonry walls while reducing the possibility of air and water penetration. Designed for masonry walls at control joint. <b>ASTM D 2000 2 AA 805</b> <b>ASTM D 2240</b>		<b>Rubber Control Joint</b>						
		<input type="checkbox"/> 2901 - Standard		<input type="checkbox"/> 2900 - ' T '				
<b>Property</b>	<b>Nominal Value</b>	<b>Recommended Spacing Of Control Joints</b>		<b>Vertical Spacing Of Joint Replacement</b>				
Tensile-Strength	2425 psi			<i>None</i>	<i>24"</i>	<i>16"</i>	<i>8"</i>	
Modulus @ 100 elongation, psi	1100			Express as ratio of panel length to height 1/h	<i>2</i>	<i>2-1/2"</i>	<i>3"</i>	<i>4"</i>
Specific Gravity	1.32			With panel length (l) not to exceed regardless of height	<i>40</i>	<i>45</i>	<i>50'</i>	<i>60'</i>
Ultimate	375%							
Elongation-Sheet								
Water Absorption	per ASTM D 570							
Brittle Point (calculated)	-10° F							
Hardness-Shore A/10	85 +/- 5							

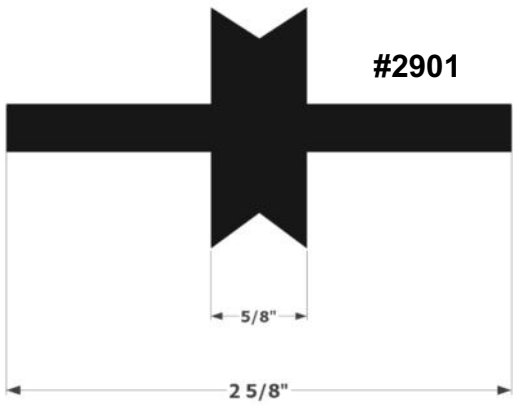

[www.wirebond.com](http://www.wirebond.com)

MASONPRO, Inc.  
 43300 Seven Mile Road  
 Northville, MI 48167  
 1-800-659-4731  
[www.masonpro.com](http://www.masonpro.com)