


# PRODUCT SUBMITTAL


WIRE-BOND

## SureTie Tapcon Thermal\* (CMU & Concrete)

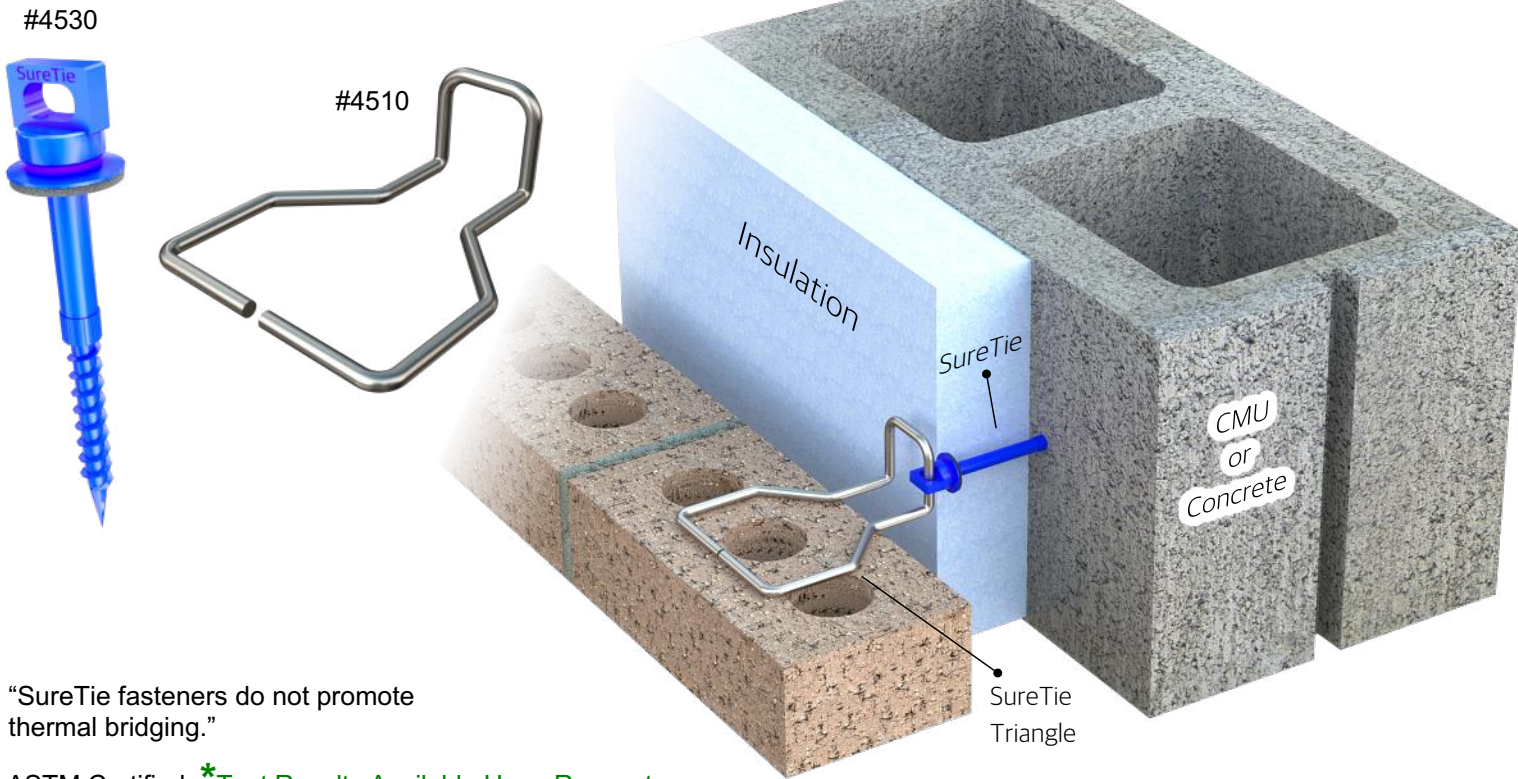

\* "SureTie fasteners do not promote thermal bridging."

ASTM Certified: \*Test Results Available Upon Request

MATERIAL CONFORMANCE	SIZES / FINISHES															
<p><b>ASTM A1064/A1064M, ASTM A82 / A82M</b> - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi</p> <p><b>ACI / ASCE 530</b> - (Building code requirements for masonry structures)</p> <p>Hot Dip Galvanized after fabrication / Zinc Coating <b>ASTM A153 / A153M-B2 (1.50 oz per sq ft)</b></p> <p>Stainless Steel <b>ASTM 580 / ASTM 580M Type 304</b> (Type 316 available on special order)</p>	<p><b>#4530 SureTie Tapcon</b> Blue climaseal finish resulted in 0% red rust at 1000 hours exposure to ASTM B-117 salt spray testing.</p> <p><b>Insulation:</b></p> <table border="0"> <tr> <td>0"</td> <td>1"</td> <td>1-1/2"</td> <td>2"</td> <td>2-1/2"</td> </tr> <tr> <td>3"</td> <td>3-1/2"</td> <td>4"</td> <td>4-1/2"</td> <td></td> </tr> </table> <p><b>#4510 SureTie Triangle</b> 3/16"</p> <table border="0"> <tr> <td>3"</td> <td>4"</td> <td>5"</td> <td>7"</td> <td>9"</td> </tr> </table> <p><b>FINISH : ( SureTie Triangle)</b> Hot Dip Galvanized Stainless Steel</p>	0"	1"	1-1/2"	2"	2-1/2"	3"	3-1/2"	4"	4-1/2"		3"	4"	5"	7"	9"
0"	1"	1-1/2"	2"	2-1/2"												
3"	3-1/2"	4"	4-1/2"													
3"	4"	5"	7"	9"												
 <p><b>Recycled Content:</b> Mill Galvanized &amp; Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre-Consumer,</p> <p>Stainless Steel, 60% Post Consumer V O C Content - 0%</p>																

WIRE-BOND

MASONPRO, Inc.  
43300 Seven Mile Road  
Northville, MI 48167  
1-800-659-4731  
www.masonpro.com