



PRODUCT SUBMITTAL

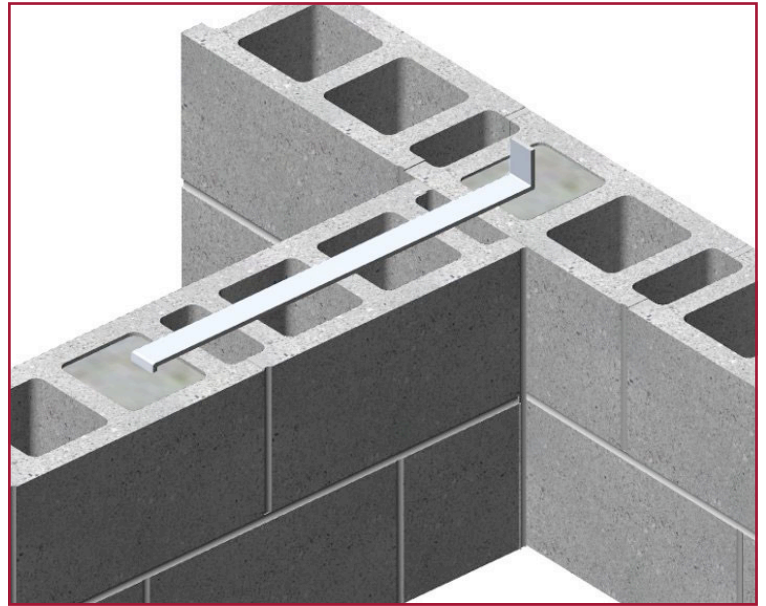

WIRE-BOND[®]

3000Z Rigid Steel Tie

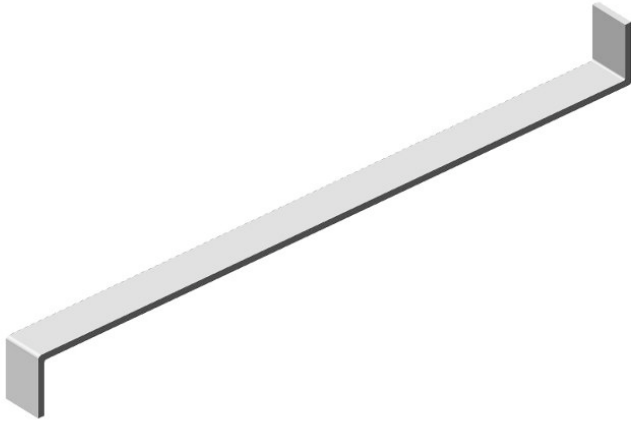

Only necessary, in the very rare case, where intersecting CMU walls develop flange action (shear transfer).

MATERIAL CONFORMANCE

SHEET METAL - (Carbon Steel) **ASTM A1008 / A1008M**

Mill Galvanized / Zinc Coating: **ASTM A641 / A641M (0.10 Oz per sq ft)**

Hot Dip Galvanized after fabrication / Zinc Coating
ASTM A153 / A153M-B2 (1.50 oz per sq ft)

Stainless Steel **ASTM 580 / ASTM 580M Type 304** (Type 316 available on special order)

Recycled Content:

Mill Galvanized & Hot Dip,
82.8 % Post-Consumer
17 % Post Industrial / Pre - Consumer

Stainless Steel,
60% Post Consumer
V O C Content - 0%

Standard (IBC) Size:

1/4" x 1-1/2" x 24" with 2" bends

Other sizes available upon request

FINISH:

Hot Dip Galvanized



www.wirebond.com

MASONPRO, Inc.
43300 Seven Mile Road
Northville, MI 48167
1-800-659-4731
www.masonpro.com