


## Z-Straps

Masonry to Masonry



Shear Wall Conditions

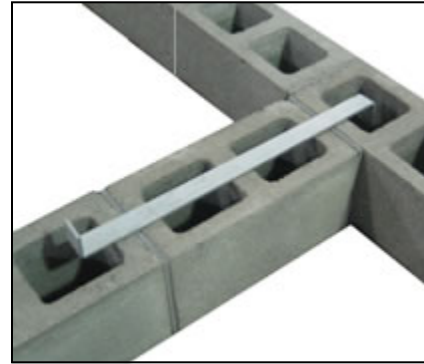

### Product Information:

#### Uses:

- Anchoring masonry to masonry for bearing and shear intersecting perpendicular CMU walls.

#### Dimension:

- 1-1/2" x 1/4" x 2" x 24" x 2"

#### Finish:

- Hot Dip Galvanized after fabrication/ Zinc Coating  
ASTM A153/A153M-B2 (1.50 oz. per square foot)

#### Advantages:

- Code approved for transfer of shear between intersecting walls to be connected  
1-1/2" x 1/4" x 2" x 24" x 2"

Consult structural engineer to verify width, thickness, length and placement requirements.

For technical assistance call us toll free at 1-800-659-4731.