


PRODUCT SUBMITTAL

WIRE-BOND

1001 Type II Anchor

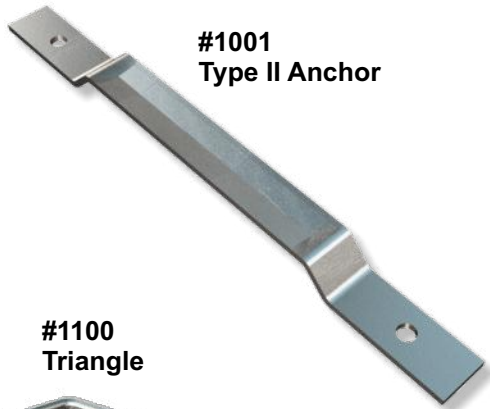

**#1001
Type II Anchor**



**#1100
Triangle**



MATERIAL CONFORMANCE

ASTM A1064/A1064M, ASTM A82 / A82M - (Cold drawn steel wire)
Tensile Strength - 80,000 psi
Yield Point - 70,000 psi

ACI / ASCE 530 - (Building code requirements for masonry structures)

SHEET METAL - (Carbon Steel) **ASTM A1008 / A1008M**

Mill Galvanized / Zinc Coating: **ASTM A641 / A641M (0.10 Oz per sq ft)**

Hot Dip Galvanized after fabrication / Zinc Coating
ASTM A153 / A153M-B2 (1.50 oz per sq ft)

Stainless Steel **ASTM 580 / ASTM 580M Type 304** (Type 316 available on special order)

Recycled Content:

Mill Galvanized & Hot Dipped,
82.8% Post-Consumer
17% Post Industrial / Pre-Consumer,

Stainless Steel,
60% Post Consumer
V O C Content - 0%



SIZES / FINISHES

#1001 Type II Anchor: 12 gauge thick" x 3/4" wide
9" Length

#1100 Triangle :

Diameter:	3/16"		
Length:	3"	4"	5"
	6"	7"	9"

FINISH:	Mill Galvanized	Stainless Steel
	Hot Dip Galvanized	

WIRE-BOND

MASONPRO
43300 Seven Mile Road
Northville, MI 48167
1-800-659-4731
www.masonpro.com